


CODE	MODEL
------	-------

795238 RIDER Softener



Sizes (AxBxC)

1100 x 360 x 530

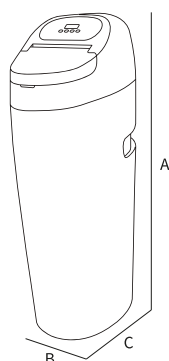

• Code	795238
• Resin volume	25 liters

• Vessel	9X35
• Working flow	1 m ³ /h
• Peak flow	1,5 m ³ /h
• Maximum hardness	120°HF

High efficiency

• Salt/Regeneration	1,5 Kg Salt
• Exchange capacity	96° HFxm ³

Standard

• Salt/Regeneration	3,0 Kg Salt
• Exchange capacity	141° HFxm ³

High capacity

• Salt/Regeneration	6,3 Kg Salt
• Exchange capacity	175° HFxm ³

• Minimum flow	0,1 m ³ /h
• Working temperature	4-35°C
• Working pressures	2,5 - 8 bar

• Pressure rating	8 bar
• Electrical connection	220V/50Hz-24VAC
• Rated electrical power	4 W
• Protection class	TYPE III

High efficiency: 96°HFxm³

15°HF	25°HF	30°HF	35°HF	45°HF	55°HF
6,40	3,84	3,20	2,74	2,13	1,75

Standard: 141°HFxm³

15°HF	25°HF	30°HF	35°HF	45°HF	55°HF
9,40	5,64	4,70	4,03	3,13	2,56

High capacity: 175°HFxm³

15°HF	25°HF	30°HF	35°HF	45°HF	55°HF
11,67	7,00	5,83	5,00	3,89	3,18



Puricom Water Industrial Corporation and Ionfilter (B-60326279) are members of Water Quality Association.



ADVERTORIO por ENAC
Código: 11/24/2020/140712

The quality system of Ionfilter (B-60326279) for the commercialization of water treatment equipment and appliances. Design and delivery of non-regulated training related to the technology of commercialized equipment is certified and fulfills the requirements of the norm UNE-ISO-9001.



Puricom Europe belong to Aqua Spain's group, member of Aqua Europe (European national associations federation)

